

Sensorflow 21 Washbasin Tall Spout Electronic ISensor, Link

ILLUSTRATED

A4172 Sensorflow 21 washbasin mounted tall spout with integral sensor, anti-vandal laminar flow outlet, copper tube inlet, servicing valve and filter, link

ILLUSTRATED PRODUCT DETAILS

Weights

A4172 3.40 KG

Materials

A4172 Chrome Plated Brass

Finishes

A4172  Chrome (AA)


Flow rates

A4172 3.7 Litres per minute @ 3 bar pressure

Special Notes

Designed to be supplied with pre-mixed water.

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, please see A5900 (for use with 15mm pipework) or A5901AA (for use with 22mm pipework). The sensor is set to work in the normal handwashing position. All spouts supplied complete with individual solenoid valve, copper tube inlet and combined servicing valve and filter. Spouts with integral sensors detect hands within the sensing range and the solenoid valve is opened. Automatically shuts off if sensor is obstructed for a maximum of 55 seconds. Must link to a mains version. Flow rate regulated to 3.7 litres per minute at 1 bar minimum pressure.

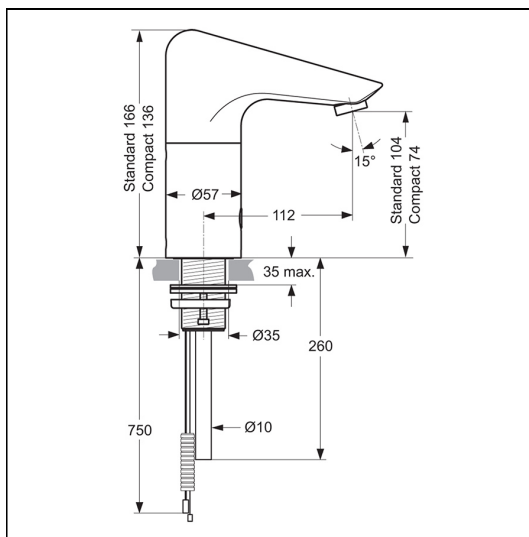

ACCREDITATIONS

A4172(AA)

Unified
Water Label



3.70

Litres
Per
Minute

FEATURES

