

Sensorflow 21 Panel Mounted Cast Spout, Integral Sensor, Mains

ILLUSTRATED

A4178 Sensorflow 21 panel mounted 150mm cast spout with integral sensor, flexible inlet tail, solenoid valve, combined servicing valve and filter, sensor and solenoid cables and flex connectors, mains

ILLUSTRATED PRODUCT DETAILS

Weights

A4178 2.40 KG

Finishes

A4178  Chrome (AA)

Materials

A4178 Chrome Plated Brass

Flow rates

A4178 4.7 Litres per minute @ 3 bar pressure

FINISH OPTIONS



 (AA) Chrome

 (GN) Ultra Steel

Special Notes

All spouts supplied complete with individual solenoid valve, copper tube inlet and combined servicing valve and filter. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, please see A5900AA (for use with 15mm pipework) or A5901AA (for use with 22mm pipework). Spouts with integral sensors detect hands within the sensing range and the solenoid valve is opened. Automatically shuts off if sensor is obstructed for a maximum of 50 seconds. Mains powered transformer with option to use up to 5 link units per main unit or stand alone battery powered units. Regulated flow rate 4.7 litres per minute at 1 bar.

Mains powered Sensorflow products must be connected to a continuous permanent power supply of these require 220-240 volts and each 1 having its own fuse spur.

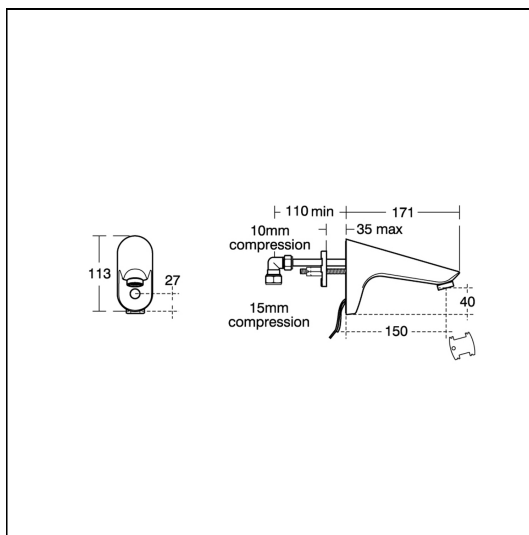

ACCREDITATIONS

A4178(AA)



FEATURES

