

Sensorflow 21 Washbasin Small Spout Electronic Sensor, Mains

ILLUSTRATED

A4798 Sensorflow 21 washbasin mounted spout with integral sensor, copper tube inlets, servicing valves and filter, mains

ILLUSTRATED PRODUCT DETAILS

Weights

A4798 2.95 KG

Finishes

A4798  Chrome (AA)

Materials

A4798 Chrome Plated Brass

Flow rates

A4798 4.7 Litres per minute @ 3 bar pressure

Special Notes


Designed to be supplied with pre-mixed water.

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device please see A5900AA (for use with 15mm pipework) or A5901AA (for use with 22mm pipework).

The sensor is set to work in the normal handwashing position. All spouts supplied complete with individual solenoid valve, copper tube inlet and combined servicing valve and filter. Spouts with integral sensors detect hands within the sensing range and the solenoid valve is opened.

Automatically shuts off if sensor is obstructed for a maximum of 55 seconds. Mains powered transformer with option to use up to 5 link units per main unit or stand alone battery powered units. Flow rate regulated at 5 litres per minute at 1 bar pressure.

Mains powered Sensorflow products must be connected to a continuous permanent power supply of these require 220-240 volts and each 1 having its own fuse spur.

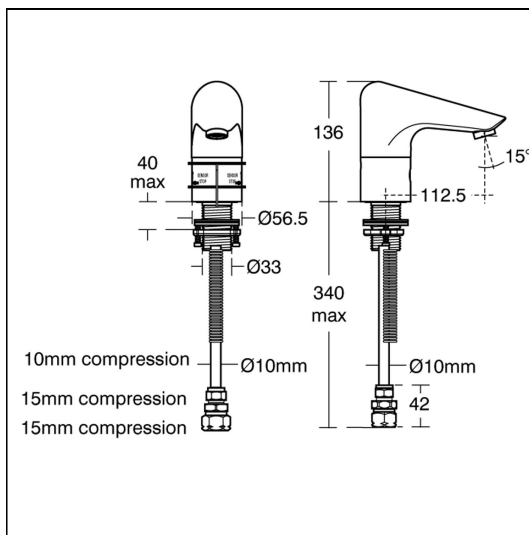

ACCREDITATIONS

A4798(AA)



FEATURES

