

## ILLUSTRATED

**A4799** Sensorflow 21 washbasin mounted spout with integral sensor, copper tube inlets, servicing valves and filter, link

## ILLUSTRATED PRODUCT DETAILS

## Weights

**A4799** 2.87 KG

## Finishes

A4799  Chrome (AA)

## Materials

**A4799** Chrome Plated Brass


## Flow rates

**A4799** 4.7 Litres per minute @ 3 bar pressure

## Special Notes

Designed to be supplied with pre-mixed water.

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, please see A5900AA (for use with 15mm pipework) or A5901AA (for use with 22mm pipework). The sensor is set to work in the normal handwashing position. All spouts supplied complete with individual solenoid valve, copper tube inlet and combined servicing valve and filter. Spouts with integral sensors detect hands within the sensing range and the solenoid valve is opened. Automatically shuts off if sensor is obstructed for a maximum of 55 seconds. Must link to mains version A4798AA. Flow rate regulated at 5 litres per minute at 1 bar pressure.

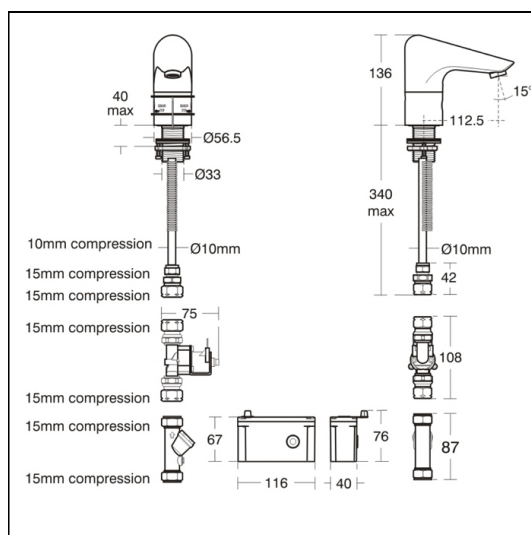

## ACCREDITATIONS

**A4799(AA)**



## FEATURES

