

Sensorflow Wave basin mixer 1 hole with temperature control (mains)

ILLUSTRATED

A6163 Sensorflow Wave 1 hole basin mixer with temperature control, mains

ILLUSTRATED PRODUCT DETAILS

Weights

A6163 2.50 KG

Materials

A6163 Chrome Plated

Finishes

A6163  Chrome (AA)

Flow rates

A6163 3.7 Litres per minute @ 3 bar pressure


Special Notes

Minimum operating pressure 1 bar. Fitted with a proximity sensor which will automatically shut off 2 seconds after sensor no longer detects movement.

Automatic flow stop factory set to operate after 55 seconds of continuous operation. Adjustable duty flush/purge facility.

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, please see A5900AA (for use with 15mm pipework) or A5901AA (for use with 22mm pipework).

Mains powered Sensorflow products must be connected to a continuous permanent power supply of these require 220-240 volts and each 1 having its own fuse spur.

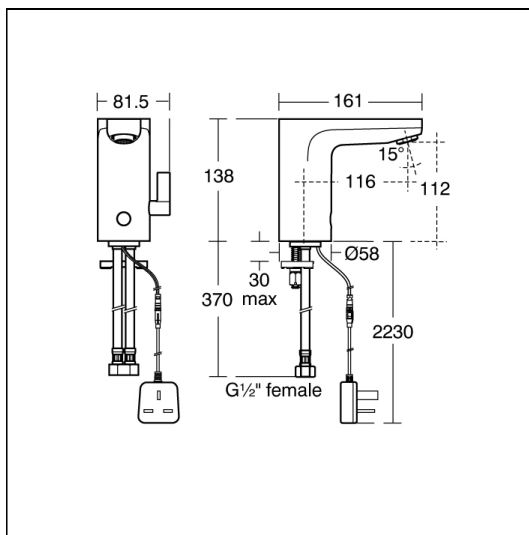

ACCREDITATIONS

A6163(AA)

Unified
Water Label



3.70 Litres
Per
Minute

FEATURES

