

## Ceratherm T50 Exposed Thermostatic Shower System

### ILLUSTRATED


**A7227** Ceratherm T50 exposed thermostatic shower system with Idealrain ø200mm round rainshower, Idealrain Evo 3 function ø110mm handspray and 1.75m Ideaflex hose

### ILLUSTRATED PRODUCT DETAILS

#### Weights

**A7227** 4.05 KG

#### Finishes

**A7227**  Chrome finish (AA)

#### Materials


**A7227** Chrome Plated Brass

#### Flow rates

**A7227** 8 Litres per minute @ 3 bar pressure

#### Special Notes

Removable 12 litre per minute eco flow regulator fitted in the fixed head and 8 litre per minute regulator in the handspray.  
Minimum operating pressure of 0.5 Bar

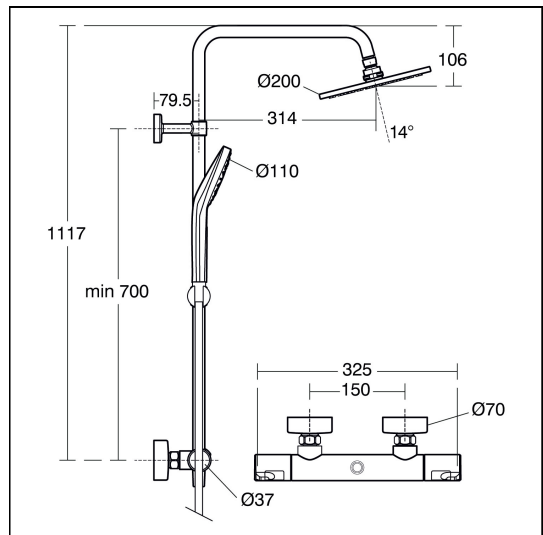

### ACCREDITATIONS

### FEATURES

