

Ceratherm T25 Exposed Thermostatic Bath Shower System

ILLUSTRATED

- A7590** Ceratherm T25 exposed thermostatic bath shower system with Idealrain ø200mm round rainshower, M3 3 function ø100mm shower handspray and 1.75m Idealflex hose
- BD198** Idealrain fast fix connection set for exposed shower valves

ILLUSTRATED PRODUCT DETAILS


Weights

- A7590** 3.90 KG
- BD198** 0.27 KG

Materials

- A7590** Chrome Plated Brass
- BD198** Chrome Plated Brass

Finishes


- A7590**  Chrome (AA)
- BD198**  Chrome (AA)

Flow rates

- A7590** 8 Litres per minute @ 3 bar pressure

Special Notes

Removable 12 litre per minute eco flow regulator fitted in the fixed head and 8 litre per minute regulator in the handspray. Minimum operating pressure of 0.5 Bar

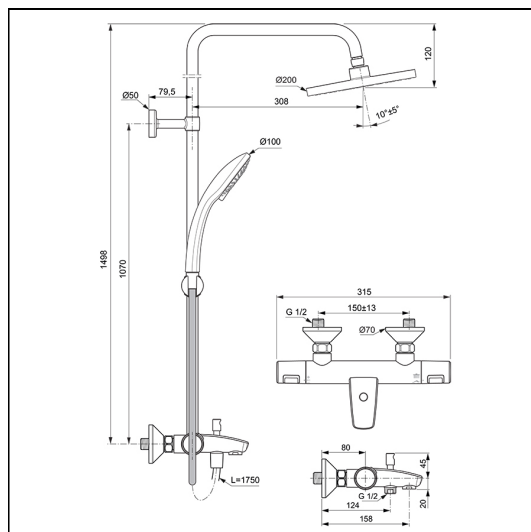

ACCREDITATIONS

FEATURES

