

Ceratherm T100 Exposed Thermostatic Bath Shower System

ILLUSTRATED

- A7591** Ceratherm T100 Flex exposed thermostatic bath shower system with Idealrain 300x200mm rectangular rainshower on horizontal and vertical adjusting arm, Idealrain Evo diamond 3 function handspray and 1.75m Idealflex hose
- BD198** Idealrain fast fix connection set for exposed shower valves

ILLUSTRATED PRODUCT DETAILS

Weights

A7591 4.91 KG

BD198 0.27 KG

Materials

A7591 Chrome Plated Brass

BD198 Chrome Plated Brass

Finishes

A7591  Chrome (AA)



BD198  Chrome (AA)

Flow rates

A7591 8 Litres per minute @ 3 bar pressure

Special Notes

Removable 12 litre per minute eco flow regulator fitted in the fixed head and 8 litre per minute regulator in the handspray. Minimum operating pressure of 0.5 Bar

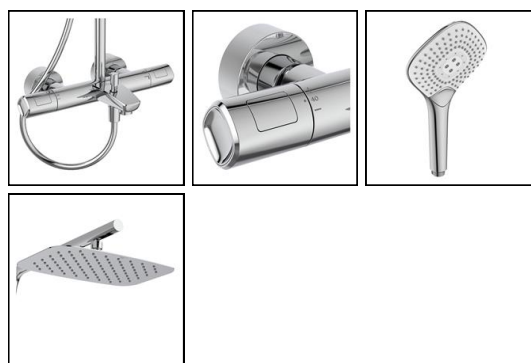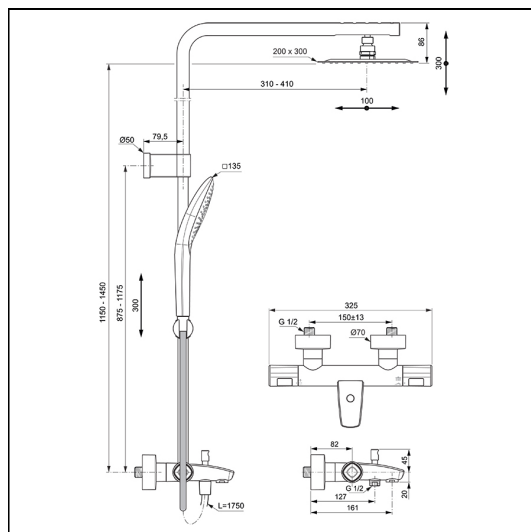

ACCREDITATIONS

FEATURES

