

## Ceratherm T125 Exposed Thermostatic Shower System

### ILLUSTRATED

**A7594** Ceratherm T125 exposed thermostatic shower system with Idealrain ø300mm round rainshower on swivelling arm, Idealrain 1 function stick handspray and 1.75m Idealflex hose

### ILLUSTRATED PRODUCT DETAILS

#### Weights

**A7594** 5.74 KG

#### Finishes

**A7594**  Chrome (AA)

#### Materials

**A7594** Chrome Plated Brass

#### Flow rates

**A7594** 8 Litres per minute @ 3 bar pressure

### FINISH OPTIONS



(AA) Chrome



(A2) Brushed Gold




(A5) Magnetic Grey



(GN) Silver Storm

#### Special Notes

Removable 12 litre per minute eco flow regulator fitted in the fixed head and 8 litre per minute regulator in the handspray. Minimum operating pressure of 0.5 Bar

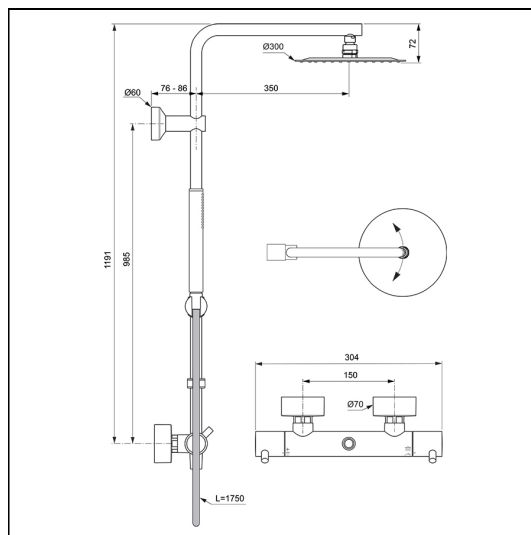

### FEATURES

