

Calista Single Lever 1 Hole Bath Shower Mixer

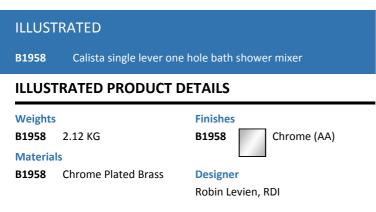

Special Notes

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, please see A5900AA for use with 15mm pipework) or A5901AA (for use with 22mm pipework). Unregulated flow rate for bath fill is 15 litres per minute at 3 bar.

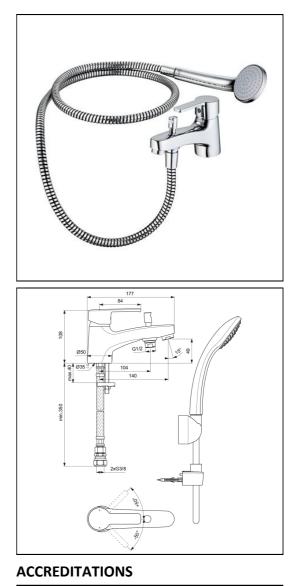

E: info@idealspec.co.uk | T: 0870 122 8822 | F: 0870 122 8282 | www.idealspec.co.uk

