

Sandringham 21 Washbasin Pillar Taps

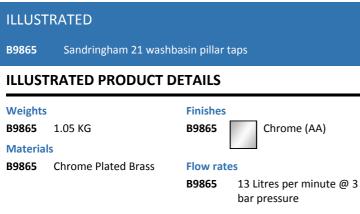

Special Notes

Suitable for balanced/unbalanced supplies. Inlets screwed 1/2" BSP male, coned for copper.

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device please see A5900AA (for use with 15mm pipework) or A5901AA (for 22mm pipework). Water saving can be achieved by use of a flow regulator such as L6935NU to deliver maximum of 4 litres per minute. Unregulated flow rate 15 litres per minute at 0.1 bar.

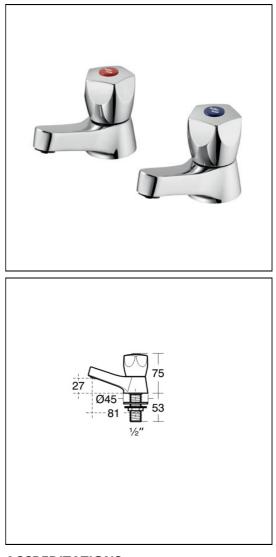

ACCREDITATIONS



E: info@idealspec.co.uk | T: 0870 122 8822 | F: 0870 122 8282 | www.idealspec.co.uk

