
Sandringham 21 High Neck Sink Pillar Taps, Crosshead Handles



Special Notes

Suitable for balanced/unbalanced supplies. Inlets screwed 1/2" BSP male, coned for copper. Pillar taps come supplied with brass back nuts. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, please see A5900AA (for use with 15mm pipework) or A5901AA (for use with 22mm pipework). Unregulated flow rate 15 litres per minute at 0.1 bar.

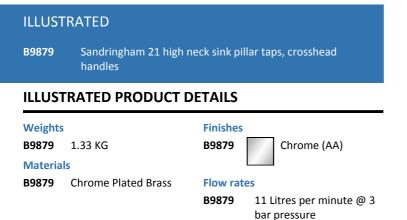