

Tempo Cube Idealform Plus+ Double-Ended Bath 170cm x 75cm No Handgrips No Tapholes

ILLUSTRATED

| | |
|--------------|---|
| E2589 | Tempo Cube 170cm x 75cm Idealform Plus+ double-ended bath, no handgrips no tapholes |
| E4797 | Unilux Plus+ 170cm front panel |
| E4832 | Unilux Plus+ 75cm end panel |
| S8970 | Trap 1½" plastic P with 75mm seal, multi-purpose outlet suitable for plastic and BS copper pipe |
| E1486 | Luxury bath pop-up waste and overflow |
| A5901 | TMV thermostatic mixing valve, 22mm |

OPTIONS

| | |
|--------------|---|
| BD264 | Ceraplan dual control bath filler |
| BD265 | Ceraplan dual control bath shower mixer |
| BD266 | Ceraplan single lever bath filler |
| BD267 | Ceraplan single lever bath shower mixer |
| S8830 | Waste 1½" bath chain and overflow, plastic plug |

ILLUSTRATED PRODUCT DETAILS







Weights

| | |
|--------------|----------|
| E2589 | 33.00 KG |
| E4797 | 3.65 KG |
| E4832 | 2.58 KG |
| S8970 | 1.00 KG |
| A5901 | 0.60 KG |

Materials

| | |
|--------------|-------------------------|
| E2589 | Idealform Plus+ |
| E4797 | High Impact Polystyrene |
| E4832 | High Impact Polystyrene |
| S8970 | Plastic |
| E1486 | Mixed Material |
| A5901 | Chrome Plated Metal |

Finishes

| | |
|--------------|--|
| E2589 |  White (01) |
| E4797 |  White (01) |
| E4832 |  White (01) |
| S8970 |  Neutral / No Finish (67) |
| E1486 |  Chrome (AA) |
| A5901 |  Chrome (AA) |

Capacity

| | |
|--------------|----------------------------|
| E2589 | 200.0 litres (to overflow) |
|--------------|----------------------------|

Designer



Robin Leven, RDI

Standards

Constructed to EN 198:2008. EN 14516

Special Notes

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, see A5901AA or Part G for guidance. One taphole fittings require offsetting from the overflow. Check positioning and compatibility before specifying.

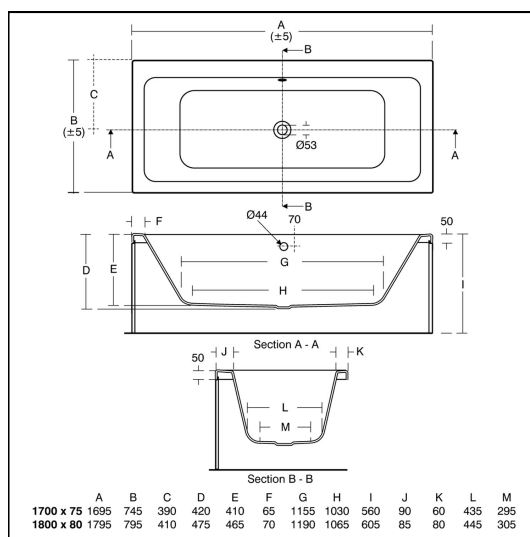

ACCREDITATIONS

E2589(01)

