Profile 21 rimmed back inlet urinal bowl


ILLUSTRATED

E5701 E6227	Profile 21 rimmed back inlet urinal bowl Urinal syphon connector with 75mm water seal, and 40mm outlet
K7106	Urinal Connecting set
A7001	Sensorflow 21 urinal flush, high pressure valve, panel mounted, mains

OPTIONS

S6120 Urinal division Vitreous China with hanger and screw

ILLUSTRATED PRODUCT DETAILS

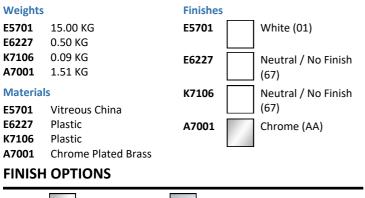

(AA) Chrome

Special Notes

Please click the (Specify this) button then configure the bowl by adding one of the sensor flow 21 electronic urinal flushing products. Mains version can power up to 5 link flushing valves or the battery versions can be independent. Please refer to Sensorflow 21 compact flushing device pages, then add as many urinal assembly types: Mains/linked battery as needed in the room schedule. Not suitable for flushing from a cistern and nominal working mains water pressure needed is 3 Br. Urinal fixed to wall with fixation set provided.

(GN) Ultra Steel

A WRAS approved DC interrupter should be fitted to satisfy the UK regulations.



