

Simplicity Steel bath 160x70cm 2 Tapholes With Handgrips & Anti-slip*

ILLUSTRATED

- E8186** Simplicity 160cm x 70cm standard gauge steel bath with chrome plated grips, two tapholes and anti-slip*
- B1151** Calista dual control two hole bath filler
- S0915** Bath flat front panel
- S0916** Bath flat end panel
- S9365** Bath panel plastic corner edge strip
- S8970** Trap 1½" plastic P with 75mm seal, multi-purpose outlet suitable for plastic and BS copper pipe
- S8840** 1 1/2" combination bath waste & trap with overflow and domed clicker
- A5901** TMV thermostatic mixing valve, 22mm

OPTIONS

- B1824** Ceraflex dual control 2 tap hole bath filler
- B1152** Calista dual control two hole bath shower mixer with shower set
- S8830** Waste 1½" bath chain and overflow, plastic plug

ILLUSTRATED PRODUCT DETAILS









Weights

- E8186** 25.05 KG
- B1151** 1.60 KG
- S0915** 2.14 KG
- S0916** 3.50 KG
- S9365** 0.01 KG
- S8970** 1.00 KG
- S8840** 0.31 KG
- A5901** 0.60 KG

Materials

- E8186** Porcelain Enamelled Steel
- B1151** Chrome Plated Brass
- S0915** High Impact Polystyrene
- S0916** High Impact Polystyrene
- S9365** Plastic
- S8970** Plastic
- S8840** Plastic
- A5901** Chrome Plated Metal

Finishes

- E8186**  White (01)
- B1151**  Chrome (AA)
- S0915**  White (01)
- S0916**  White (01)
- S9365**  White (01)
- S8970**  Neutral / No Finish (67)
- S8840**  Chrome (AA)
- A5901**  Chrome (AA)

Capacity

- E8186** 150.0 litres (to overflow)

Flow rates



- B1151** 70 Litres per minute @ 3 bar pressure

Standards

Manufactured to BS 1344-3:1998
Standard gauge 2mm porcelain enamelled steel

Special Notes

*Anti-slip reduces the likelihood of slipping but it does not prevent all slipping. Care to be taken when cleaning as aggressive products may reduce the effectiveness of the slip resistant area. Consideration should

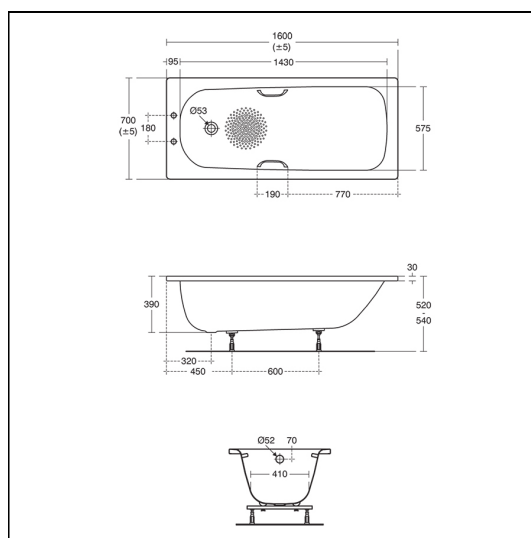

FEATURES



Simplicity Steel bath 160x70cm 2 Tapholes With Handgrips & Anti-slip*

be given to safe hot water delivery and the use of an appropriate temperature reduction device, see A5901AA or Part G for guidance.