Silhouette 1800mm Washtrough


ILLUSTRATED

S0626Silhouette 1800mm 3 person washtrough with wasteA4852Sensorflow 21 compact washbasin mounted spout with
integral sensor, 3.7 litre per minute aerated spray outlet,
combined inline servicing valve and filter, mains

OPTIONS

A4853 Sensorflow 21 compact washbasin mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inline servicing valve and filter, link

ILLUSTRATED PRODUCT DETAILS

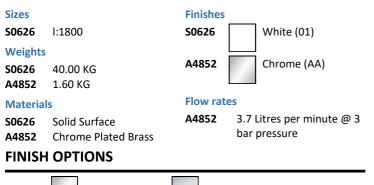

(GN) Ultra Steel

(AA) Chrome		

Standards


EN 695 BS EN 14296

Special Notes

1 Mains spout (A4852) and 2 link spouts (A4853) to be configured. Clean using a damp cloth or sponge. Wipe dry with a soft cloth to prevent spotting.

*Please note tap holes are not pre drilled.





E: info@idealspec.co.uk | T: 0870 122 8822 | F: 0870 122 8282 | www.idealspec.co.uk

