# Silhouette 1200-1500mm Washtrough Bespoke Sizes

## **ILLUSTRATED**

Sold Silhouette 1200-1500mm configurable washtrough with

waste

A4852 Sensorflow 21 compact washbasin mounted spout with

integral sensor, 3.7 litre per minute aerated spray outlet,


combined inlet servicing valve and filter, mains

#### **OPTIONS**

A4853

Sensorflow 21 compact washbasin mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inline servicing valve and filter, link

### **ILLUSTRATED PRODUCT DETAILS**

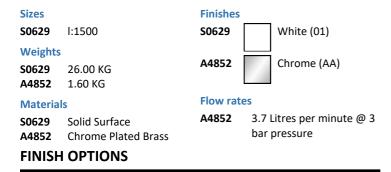


(GN) Ultra Steel

## (AA) Chrome

Standards EN 695 BS EN 14296

### **Special Notes**

1 Mains spout (A4852) and 2 link spouts (A4853) to be configured. Clean using a damp cloth or sponge. Wipe dry with a soft cloth to prevent spotting.





<sup>\*</sup>Please note tap holes are not pre drilled.