Silhouette 180-210cm Washtrough Bespoke Sizes

ILLUSTRATED

S0631 Silhouette 1801-2100mm configurable washtrough with

waste

A4852 Sensorflow 21 compact washbasin mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet,


combined inlet servicing valve and filter, mains

OPTIONS

A4853

Sensorflow 21 compact washbasin mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inline servicing valve and filter, link

ILLUSTRATED PRODUCT DETAILS

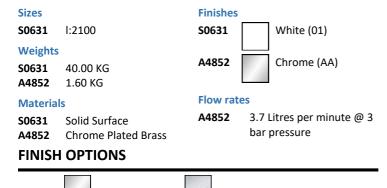

(GN) Ultra Steel


Standards

(AA) Chrome

EN 695 BS EN 14296

Special Notes

1 Mains spout (A4852) and 3 link spouts (A4853) to be configured. Clean using a damp cloth or sponge. Wipe dry with a soft cloth to prevent spotting.





^{*}Please note tap holes are not pre drilled.