Edit R Wall Mounted WC Pan

ILLUSTRATED

S0794 Edit R Wall Mounted WC Pan

S0798 Edit R Toilet Seat and Cover - soft close

S0767 Oleas M2 mechanical dual flushplate Armitage Shanks -

chrome

R0153 ProSys 1150mm height, mechanical wall hung WC frame,

120 depth, front actuation


Senta Pro inspection plate white

OPTIONS


R0137

R0137	Septa Pro inspection plate white
R0099	ProSys electronic conversion kit for infra-red actuated flushplates (Septa Pro E1 & E2) (120 depth frames and cisterns only)
S3643	Conceala 2 4.5/3 or 4/2.6 litre cistern, dual flush valve, side supply, internal overflow, alternative height plastic flushbends, no flushplate/button
E4463	Karisma flush plate, dual flush, unbranded for Conceala 2 cisterns
S0857	Oleas P2 pneumatic dual flushplate Armitage Shanks - chrome
S0858	Septa Pro M1 mechanical metal dual flushplate Armitage Shanks
S0859	Septa Pro M2 mechanical metal single flushplate Armitage Shanks
S0775	Septa Pro P1 pneumatic metal dual flushplate Armitage Shanks
S0860	Septa Pro P2 pneumatic metal dual small flushplate Armitage Shanks
P0109	Septa Pro XS pneumatic push button no logo - chrome
R0184	Septa Pro XS pneumatic push button, no logo
S0772	Septa Pro E1 electronic (infrared) & manual metal dual flushplate Armitage Shanks
S0773	Septa Pro E2 electronic (infrared) metal dual flushplate Armitage Shanks
R0100	ProSys half frame for wall hung WC pans (no cistern)
R0313	ProSys 1150mm height, pneumatic wall hung WC frame, 120 depth, front actuation
R0314	ProSys 1150mm height, freestanding mechanical wall hung WC frame, front actuation
E0060	Support frame with bolts for wall mounted toilet bowls





ACCREDITATIONS




FEATURES





ILLUSTRATED PRODUCT DETAILS

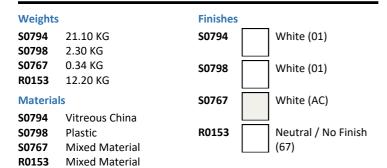

E: info@idealspec.co.uk | T: 0870 122 8822 | F: 0870 122 8282 | www.idealspec.co.uk



Edit R Wall Mounted WC Pan

Designer

Robin Levien, RDI

FINISH OPTIONS



Standards

Vitreous china to BS3402. WC pan to BS EN 997 and BS EN 33

Special Notes

Fix the E0060 support brackets to the floor within the duct and secure the WC with bolts (supplied) and hidden fixing set provided. Screw the bolts to the back wall. The bowl should not be installed with lever activated cistern fixed with syphon. Drawing shows the bowl with a Conceala 2 cistern and support brackets, heights may be different when used with a Prosys frame. Oleas, Solea, Altes & Symfo are compatible with Prosys cisterns only. Please see flushplate section for full finish/colour options.

