

# Edit 120cm Washtrough



## ILLUSTRATED

- S1212** Edit 120cm solid surface washtrough
- A4852** Sensorflow 21 compact washbasin mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inlet servicing valve and filter, mains

## OPTIONS

- A4853** Sensorflow 21 compact washbasin mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inline servicing valve and filter, link

## ILLUSTRATED PRODUCT DETAILS

<b>Sizes</b>	<b>Finishes</b>
<b>S1212</b> l:1200	<b>S1212</b>  White (01)
<b>Weights</b>	<b>A4852</b>  Chrome (AA)
<b>S1212</b> 56.00 KG	<b>Flow rates</b>
<b>A4852</b> 1.60 KG	<b>A4852</b> 3.7 Litres per minute @ 3 bar pressure
<b>Materials</b>	
<b>S1212</b> Solid Surface	
<b>A4852</b> Chrome Plated Brass	

## FINISH OPTIONS

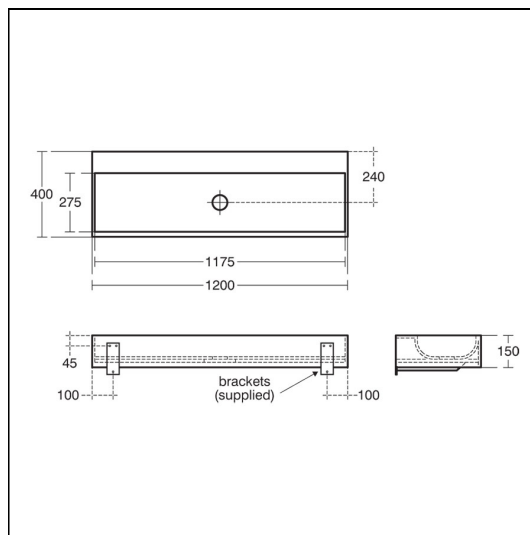


### Standards

EN695 BS EN 14296

### Special Notes

1½" waste provided. Tapholes are not pre-drilled. Clean using damp cloth or sponge and wipe dry with soft cloth to prevent spotting. Wall mounted with brackets provided. 1 mains spout (A4852) and 1 link spout (A4853) to be configured.



## FEATURES

