

Edit 180cm Washtrough



ILLUSTRATED

- S1213** Edit 180cm solid surface washtrough
- A4852** Sensorflow 21 compact washbasin mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inlet servicing valve and filter, mains

OPTIONS

- A4853** Sensorflow 21 compact washbasin mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inline servicing valve and filter, link

ILLUSTRATED PRODUCT DETAILS

Sizes		Finishes	
S1213	l:1800	S1213	 White (01)
Weights		A4852	 Chrome (AA)
S1213	85.00 KG	Flow rates	
A4852	1.60 KG	A4852	3.7 Litres per minute @ 3 bar pressure
Materials			
S1213	Solid Surface		
A4852	Chrome Plated Brass		

FINISH OPTIONS

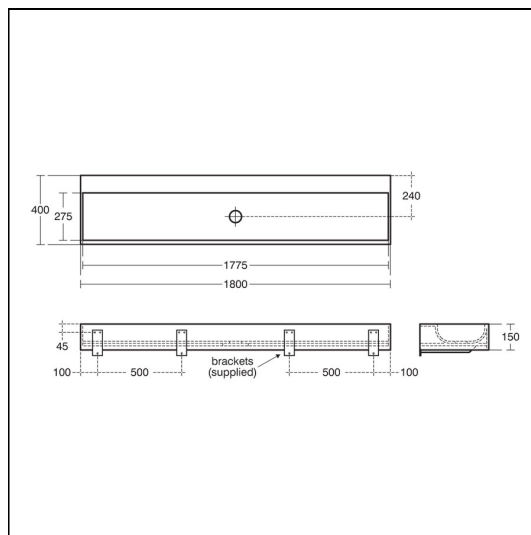


Standards

EN695 BS EN 14296

Special Notes

1½" waste provided. Tapholes are not pre-drilled. Clean using damp cloth or sponge and wipe dry with soft cloth to prevent spotting. Wall mounted with brackets provided. 1 mains spout (A4852) and 1 link spout (A4853) to be configured.



FEATURES

