

Edit 240cm Washtrough

ILLUSTRATED

- S1214** Edit 240cm solid surface washtrough
- A4852** Sensorflow 21 compact washbasin mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inlet servicing valve and filter, mains

OPTIONS

- A4853** Sensorflow 21 compact washbasin mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inline servicing valve and filter, link

ILLUSTRATED PRODUCT DETAILS

Sizes

S1214 l:2400

Weights

S1214 112.00 KG


A4852 1.60 KG

Materials

S1214 Solid Surface

A4852 Chrome Plated Brass

Finishes

S1214  White (01)

A4852  Chrome (AA)

Flow rates

A4852 3.7 Litres per minute @ 3 bar pressure

FINISH OPTIONS

 (AA) Chrome


 (GN) Ultra Steel

Standards

EN695 BS EN 14296

Special Notes

1½" waste provided. Tapholes are not pre-drilled. Clean using damp cloth or sponge and wipe dry with soft cloth to prevent spotting. Wall mounted with brackets provided. 1 mains spout (A4852) and 1 link spout (A4853) to be configured.

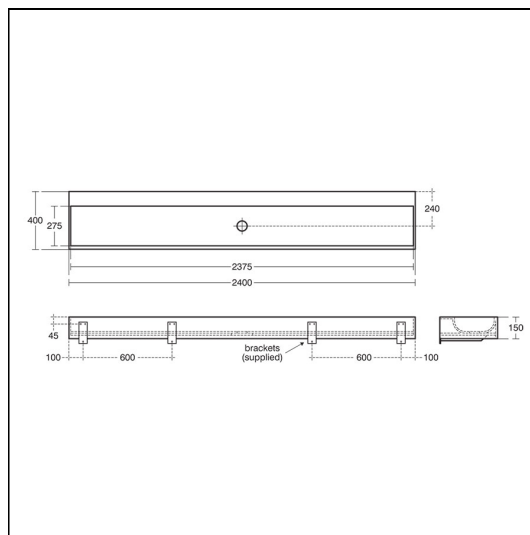

FEATURES

