

# Broadway II 180cm Washing Trough

## ILLUSTRATED

- S1238** Broadway II 180cm washing trough, undrilled for panel mounted taps or may be drilled at the pre-marked drilling points, complete with chromium plated wastes, vanity unit mounted
- A4849** Sensorflow 21 compact 230mm panel mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inline servicing valve and filter, mains
- S8910** Trap 1¼" plastic bottle, 75mm seal, multi-purpose outlet

## OPTIONS

- A4850** Sensorflow 21 compact 230mm panel mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inline servicing valve and filter, link
- A4848** Sensorflow 21 compact 230mm panel mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inline servicing valve and filter, battery
- A5900** TMV thermostatic mixing valve, 15mm

## ILLUSTRATED PRODUCT DETAILS

### Sizes

**S1238** I:1800

### Weights

**S1238** 40.00 KG

**A4849** 2.30 KG

**S8910** 0.20 KG

### Materials

**S1238** Solid Surface

**A4849** Chrome Plated Brass

**S8910** Plastic

### Finishes

**S1238**  White (01)

**A4849**  Chrome (AA)

**S8910**  Neutral / No Finish (67)

### Flow rates


**A4849** 3.7 Litres per minute @ 3 bar pressure

## FINISH OPTIONS



### Special Notes

Washing trough fits to framing or cabinet using M6 screws (not supplied)

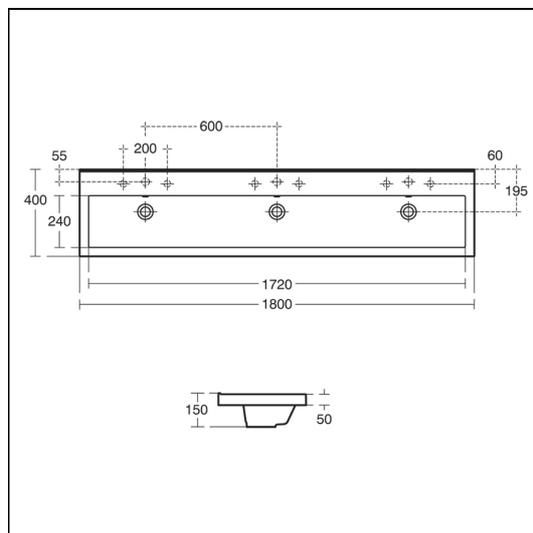

## FEATURES

