

Nisa Steel Bath 170cm 2 Taphole Handgrips

ILLUSTRATED

S1863	Nisa 170cm x 70cm steel bath with 2 tapholes, chrome plated grips and anti-slip
B3309	Sandringham SL 21 2 hole bath filler
S0915	Bath flat front panel
S0916	Bath flat end panel
S9365	Bath panel plastic corner edge strip
S8970	Trap 1½" plastic P with 75mm seal, multi-purpose outlet suitable for plastic and BS copper pipe
S8830	Waste 1½" bath chain and overflow, plastic plug
A5901	TMV thermostatic mixing valve, 22mm

ILLUSTRATED PRODUCT DETAILS









Weights

S1863	50.35 KG
B3309	1.68 KG
S0915	2.14 KG
S0916	3.50 KG
S9365	0.01 KG
S8970	1.00 KG
S8830	1.78 KG
A5901	0.60 KG

Materials

S1863	Porcelain Enamelled Steel
B3309	Chrome Plated Brass
S0915	High Impact Polystyrene
S0916	High Impact Polystyrene
S9365	Plastic
S8970	Plastic
S8830	Mixed Material
A5901	Chrome Plated Metal

Finishes

S1863	 White (01)
B3309	 Chrome (AA)
S0915	 White (01)
S0916	 White (01)
S9365	 White (01)
S8970	 Neutral / No Finish (67)
S8830	 Chrome (AA)
A5901	 Chrome (AA)

Capacity

S1863	169.0 litres (to overflow)
--------------	----------------------------

Flow rates



B3309	70 Litres per minute @ 3 bar pressure
--------------	---------------------------------------

Standards

BS 1390:1990. EN 14516

Special Notes

*Anti-slip is a resistant finish that reduces the chances of slipping, it does not prevent all slipping. Not suitable in areas involving the use of special chemicals. Framework is required at installation to support rim and secure panel. Panels require trimming to size at installation. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, see A5901AA or Part G for guidance.

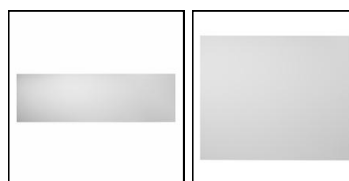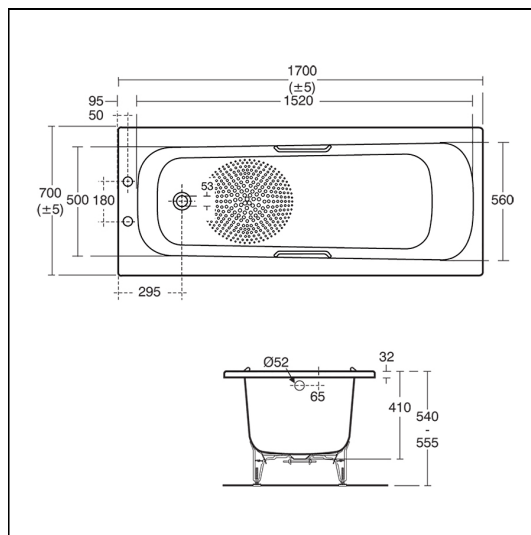

ACCREDITATIONS

S1863(01)

Unified Water Label  169.0 Litres

B3309(AA)

Unified Water Label  70.00 Litres Per Minute

FEATURES

