

ILLUSTRATED

S3078	Contour 21 rimless 75cm projection wall hung toilet bowl with horizontal outlet
S2474	Contour 21 37cm handrinse washbasin right hand taphole no overflow or chainstay hole, bottom outlet
S9110	Hangers concealed, Steel
S8900	Trap 1¼" metal bottle, 75mm seal, outlet screwed 1¼" BSP male with compression nut and ring
A4852	Sensorflow 21 compact washbasin mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inlet servicing valve and filter, mains
S6362	Contemporary 21 hinged support rail, 80cm Doc M Compliant
A5900	TMV thermostatic mixing valve, 15mm
N1381	Concept toilet roll holder
S8803	Waste 1¼" Click plug waste, 80mm slotted tail
S0830	Contour 21 60cm contemporary grab rail
S0831	Contour 21 45cm contemporary grab rail
S3604	Sensorflow 21 WC flushing device, panel mounted sensor complete with concealed valve and 4 or 4.5 litre delay fill duct cistern
S4066	Contour 21 toilet seat only, top fixing hinges and retaining buffers
S9139	Support bracket for wall mounted WC raised height with bolts
S6637	Multi-System back support, white, complete with cushion
S4302	Contour 21 flushpipe constructed, necessary for installation

S4303 Contour 21 outlet extension connector for 70/75cm WC pan outlet








Sizes

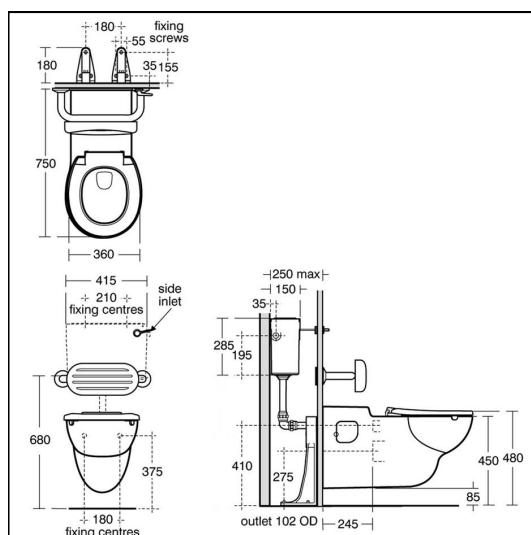
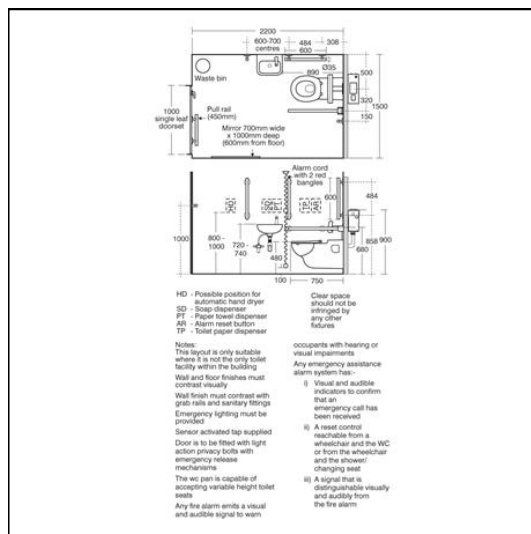
S2474 w:370 x d:300

Weights

S3078	33.50 KG
S2474	7.50 KG
S9110	0.24 KG
S8900	0.54 KG
A4852	1.60 KG
S6362	3.00 KG
A5900	0.50 KG
N1381	0.78 KG
S8803	1.00 KG
S0830	4.26 KG
S0831	3.20 KG
S3604	3.00 KG
S4066	1.55 KG
S9139	4.28 KG

Finishes

S3078		White with SmartGuard (HY)
S2474		White (01)
S9110		Neutral / No Finish (67)
S8900		Chrome (AA)
A4852		Chrome (AA)
S6362		Chrome finish (AA)
A5900		Chrome (AA)



S3604(67)












Contour 21 Wall Mounted WC Pan 75cm Proj - Doc M Sensorflow Individual Items

S6637 3.63 KG
S4302 0.39 KG

Materials

S3078 Vitreous China
S2474 Vitreous China
S9110 Metal
S8900 Chrome Plated Brass
A4852 Chrome Plated Brass
S6362 Aluminium
A5900 Chrome Plated Metal
N1381 Chrome Plated Metal
S8803 Chrome Plated Metal
S0830 Aluminium
S0831 Aluminium
S3604 Plastic
S4066 Plastic
S9139 Metal
S6637 Mixed Material
S4302 Plastic

N1381  Chrome (AA)
S8803  Chrome (AA)
S0830  Chrome (AA)
S0831  Chrome (AA)
S3604  Neutral / No Finish (67)
S4066  White (01)
S9139  Neutral / No Finish (67)
S6637  White (AC)
S4302  Neutral / No Finish (67)

Capacity

S3604 4.0 litres

Flow rates

A4852 3.7 Litres per minute @ 3 bar pressure

Designer

Robin Leven, RDI

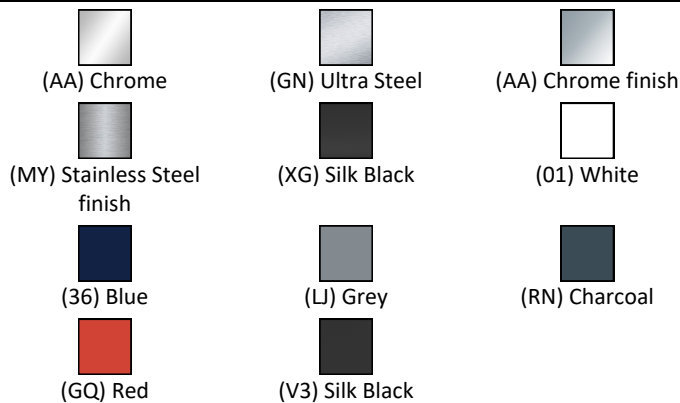
A4852(AA)



FEATURES



FINISH OPTIONS



Standards

Special Notes

For LRV and RAL numbers see Doc M introduction. For right hand corner arrangement substitute S247401 for S247301. 600mm grab rail S6484 x 4 for room set 450mm grab rail S6486 is for back of door. Mains powered Sensorflow products must be connected to a continuous permanent power supply of these require 220-240 volts and each 1 having its own fuse spur.