# Contour 2 Washbasin Wall Mounted Mixer With 150mm Proj. Nozzle

## ILLUSTRATED

**57422** Contour 21 wall mounted single control concealed washbasin mixer with ceramic disc operation, 150mm projection spout with alternative aerator or flow straightener outlet, rigid copper inlet tails integral combined filter and regulating valves

### OPTIONS

| A5900 | TMV thermostatic mixing valve, 15mm |
|-------|-------------------------------------|
| A5901 | TMV thermostatic mixing valve, 22mm |


# **ILLUSTRATED PRODUCT DETAILS**

| Weights               | Finishes          |
|-----------------------|-------------------|
| <b>\$7422</b> 3.01 KG | S7422 Chrome (AA) |
| Materials             |                   |

S7422 Chrome Plated Brass

#### **Special Notes**

Minimum inlet pressure 0.3 bar. Maximum inlet pressure 5.0 bar. The mixer will operate on unbalanced supplies within 0.3 bar to 5 bar provided the flow is controlled using the inlet regulators supplied. Product supplied with 2 x service valves which include strainers, check valves and 4 litre per minute flow regulators. Suitable for installation on panels upto 26mm thick. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, please see A5900AA (for use with 15mm pipework) or A5901AA (for use with 22mm pipework).

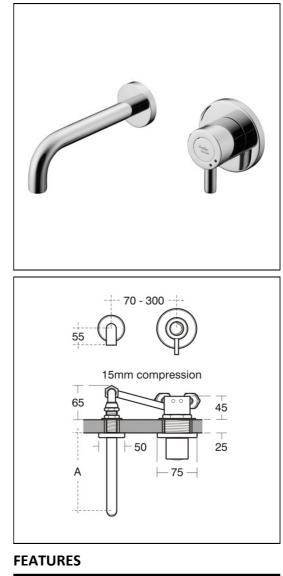



E: info@idealspec.co.uk | T: 0870 122 8822 | F: 0870 122 8282 | www.idealspec.co.uk

