

## Contour 21+ 1 Hole Thermostatic Basin Mixer with Copper Tails

### ILLUSTRATED

**A6697** Contour 21+ 1 hole thermostatic basin mixer, single sequential lever with copper tails

### OPTIONS

**EW144** M10 Stainless steel inlet tails - pair  
**EW145** M10 Stainless steel inlet tails - 5 pairs

### ILLUSTRATED PRODUCT DETAILS

#### Weights

**A6697** 2.10 KG

#### Finishes

**A6697**  Chrome (AA)

#### Materials

**A6697** Chrome Plated Brass


#### Flow rates

**A6697** 3.9 Litres per minute @ 3 bar pressure

#### Special Notes

Single sequential lever for on/off operation and temperature control. Supplied with service valves which include isolators, strainers, check valves, flow regulators and 15mm compression connections. Temperature factory set to  $40 \pm 1^\circ\text{C}$ .

Product will work on low pressure providing the flow regulator is removed and replaced using a flow guide (A960191NU). Factory fitted 3.8 litre per minute flow regulator in an anti-vandal housing. 1.9 litre per minute eco spray outlet also supplied. Both require 1 bar minimum pressure. Clamping ring with three fixing screws for a secure fix to the basin which will not come loose if installed correctly.

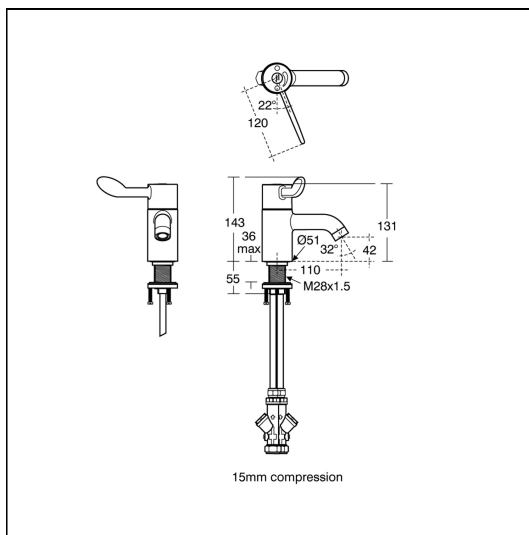

### FEATURES

